



**ENTERPRISE 380
PHU TAI JOINT STOCK
COMPANY**

CATALOGUE

**BEAUTY COMES
FROM NATURE**

COLOR




Content

PY BLACK	03
DARK GR	05
LC GREY	07
PM WHITE	09
SL WHITE	11
PY CREAM	13
PC VIOLET	15
TD VIOLET	17
LIGHT YELLOW	19
WHITE MARBLE	21
GREY BASALT	23
GL PINK	25


PY BLACK



POLISHED

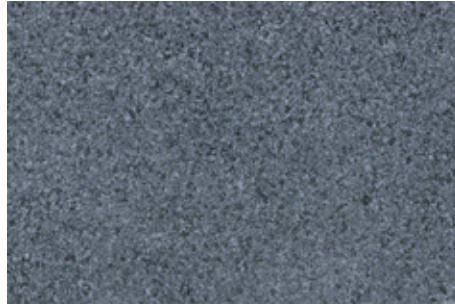

FLAMED

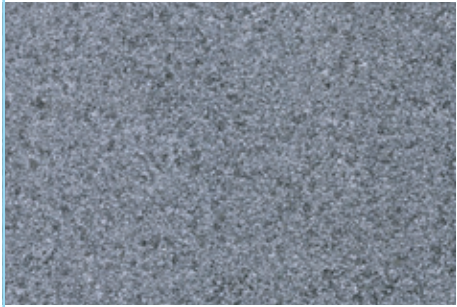

BUSH-HAMMERED

TECHNICAL DATA

Density
3 ton/m³

Flexure Strength
32.1 Mpa

Water Absorptime
0.2 %

Abrasion Resistance
63.9 mm



DARK GR



POLISHED



BUSH-HAMMERED

TECHNICAL DATA

Density
3 ton/m³


Flexure Strength
23.25 Mpa

Water Absorptime
0.3 %

Abrasion Resistance
97.8 mm



LC GREY

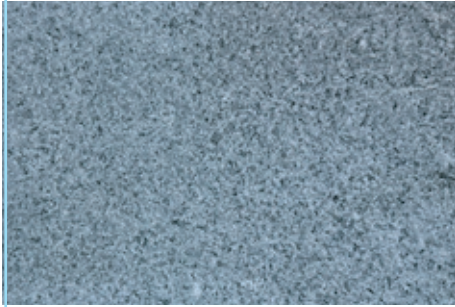

HONED



FLAMED



BUSH-HAMMERED

TECHNICAL DATA

Density
3 ton/m³


Flexure Strength
23.25 Mpa

Water Absorptime
0.3 %


Abrasion Resistance
97.8 mm




PM WHITE

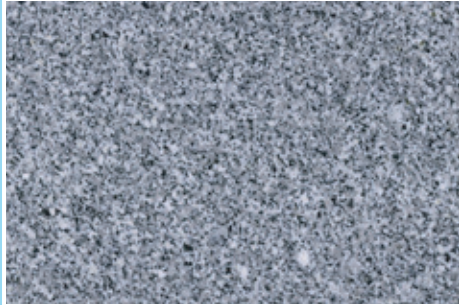

POLISHED

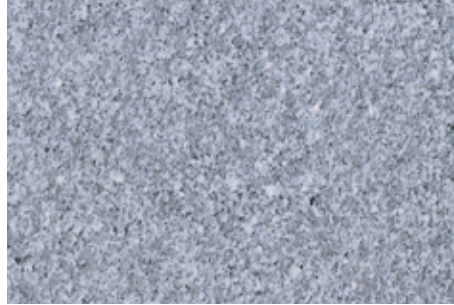

FLAMED

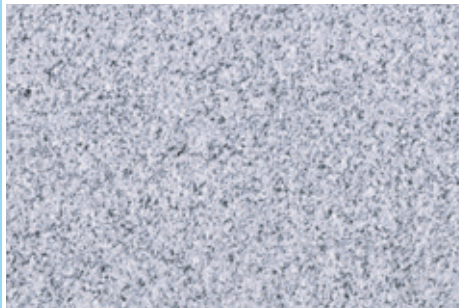

BUSH-HAMMERED

TECHNICAL DATA

Density
2,7 ton/m³


Flexure Strength
17.9 Mpa

Water Absorptime
0.6 %


Abrasion Resistance
16.6 mm




SL WHITE

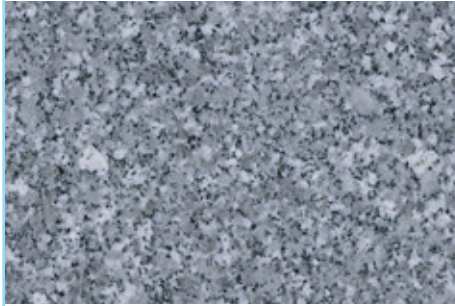

POLISHED

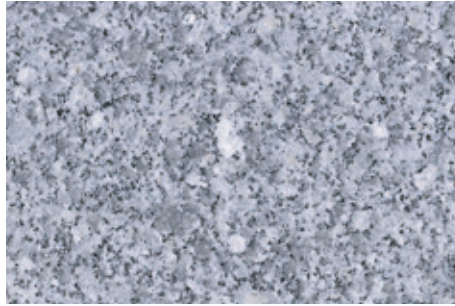

FLAMED

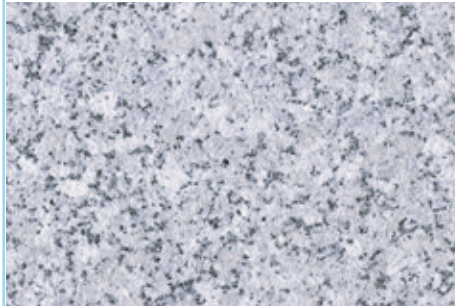

BUSH-HAMMERED

TECHNICAL DATA

Density
2.7 ton/m³


Flexure Strength
12 Mpa

Water Absorptime
0.7 %


Abrasion Resistance
16.5 mm




PY CREAM

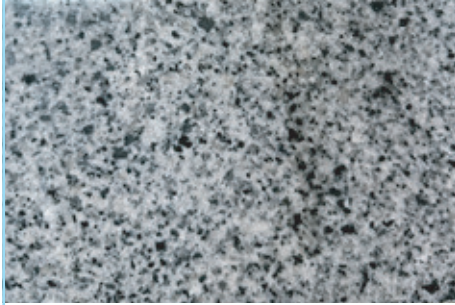

POLISHED

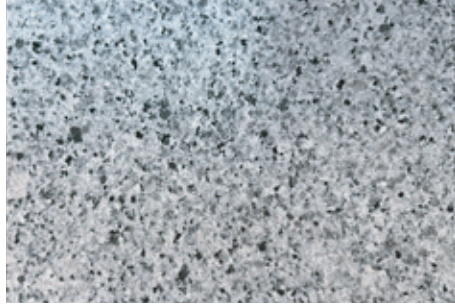

FLAMED

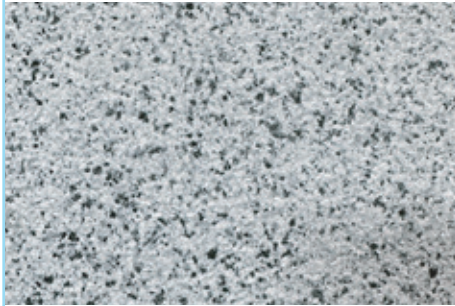

BUSH-HAMMERED

TECHNICAL DATA

Density
2,7 ton/m³


Flexure Strength
17.9 Mpa

Water Absorptime
0.6 %


Abrasion Resistance
16.6 mm



PC VIOLET

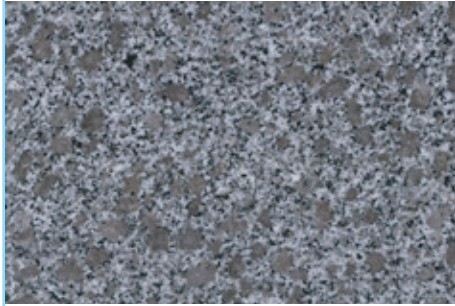

POLISHED

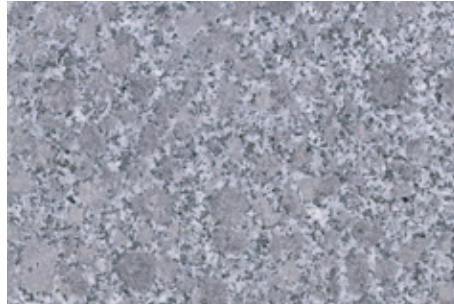

FLAMED



BUSH-HAMMERED

TECHNICAL DATA

Density
2.7 ton/m³




Flexure Strength
17 Mpa

Water Absorptime
0.4 %

Abrasion Resistance
16.3 mm



TD VIOLET

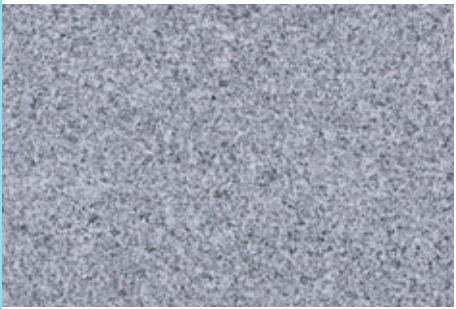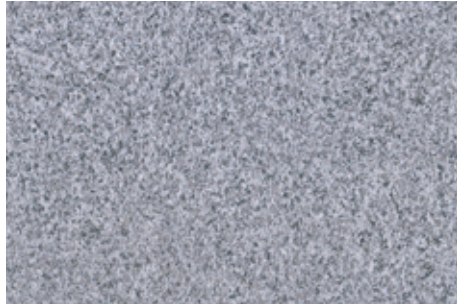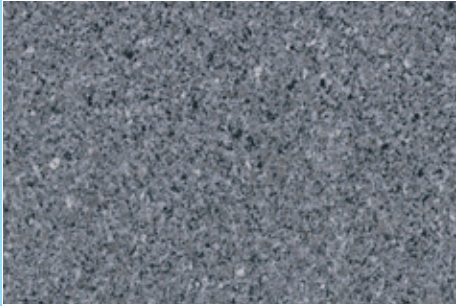

TECHNICAL DATA

Density
2.7 ton/m³


Flexure Strength
19.8 Mpa

Water Absorptime
0.25 %

Abrasion Resistance
60.8 mm




LIGHT YELLOW

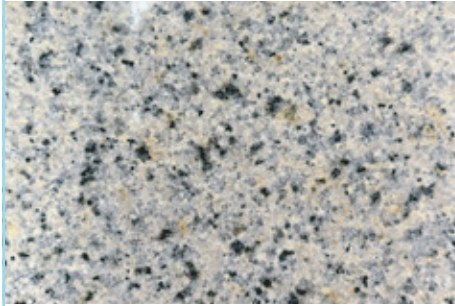

POLISHED



FLAMED

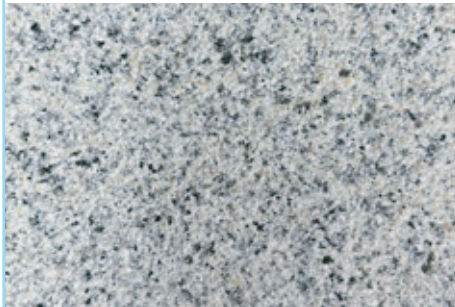

BUSH-HAMMERED

TECHNICAL DATA

Density
2.7 ton/m³

Flexure Strength
17 Mpa

Water Absorptime
0.4 %

Abrasion Resistance
16.3 mm



WHITE MARBLE



SAND BLASTED



POLISHED

TECHNICAL DATA

Density
2,7 ton/m³

Flexure Strength
18 Mpa

Water Absorptime
0.0 %

Abrasion Resistance
33.5 mm



GREY BASALT



HONED



POLISHED



BUSH-HAMMERED

TECHNICAL DATA

Density
3 ton/m³


Flexure Strength
17 Mpa

Water Absorptime
2.4%

Abrasion Resistance
18.3 mm



GL PINK

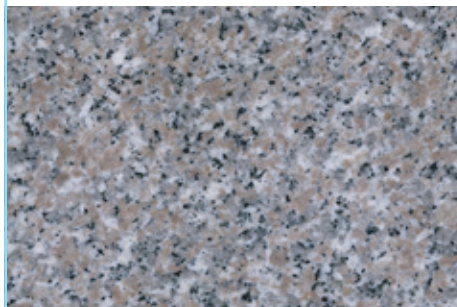

POLISHED



FLAMED



BUSH-HAMMERED

TECHNICAL DATA

Density
2.7 ton/m³

Flexure Strength
12.1 Mpa

Water Absorptime
0.28 %

Abrasion Resistance
27.7 mm

QUARTZ GRITS AND POWDER



Quartz Grits 0.1-0.2mm (70-120 mesh)



Quartz Grits 0.2-0.4mm (40-70 mesh)



Quartz Grits 0.3-0.7mm (26-40 mesh)



Quartz Grits 0.6-1.2mm (16-26 mesh)



Quartz Grits 1.2-2.5mm (8-16 mesh)



Quartz Grits 2.5-4mm (6-8 mesh)



Quartz Powder 125mesh

QUARTZ GRITS AND POWDER



PRODUCT



Content

SLABS & TILES	31
PALISADES	33
BLOCKSTEP	35
HAND-PICKED ITEMS	37
KERBSTONES	41
COUNTER TOP	43
TOMBSTONES	45
COBBLES	50

SLABS & TILES




Slabs & Tiles



PALISADES



Palisades

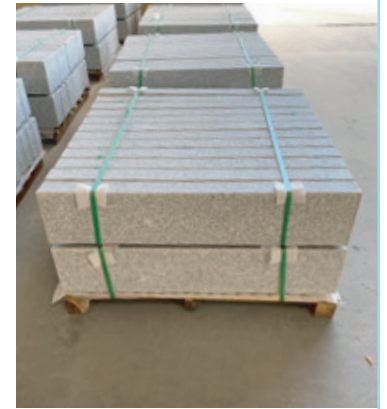

BLOCKSTEP



Blockstep



HAND-PICKED ITEM



Palisades



Walling stone



KERBSTONES





Kerbstones




COUNTER TOP



Counter Top

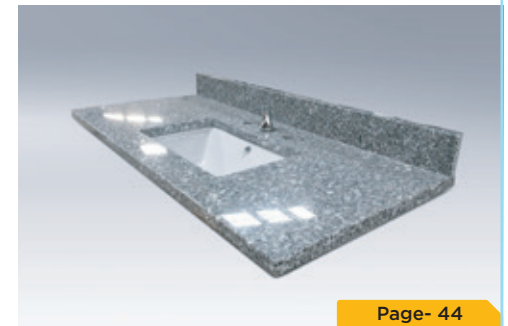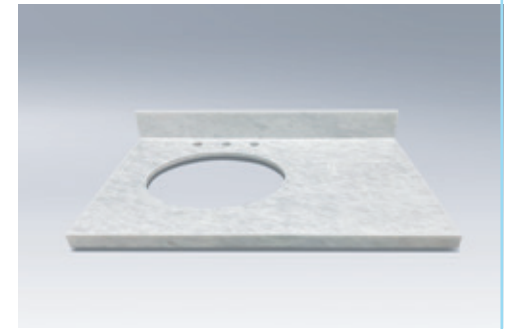


TOMBSTONES

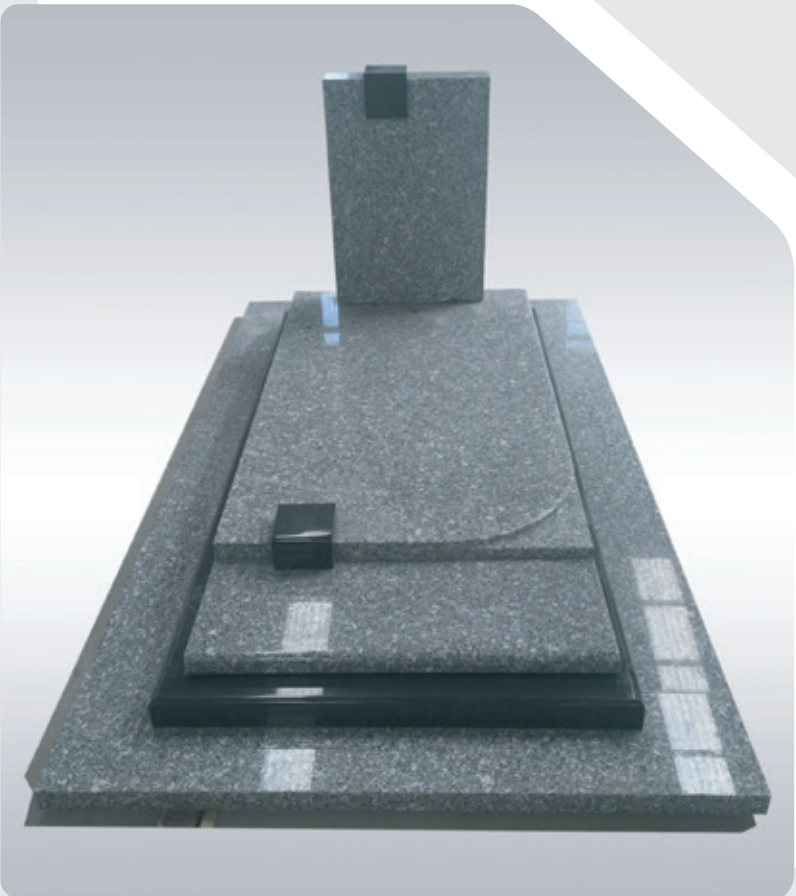



Tombstones



Tombstones




Tombstones



Tombstones



COBBLES

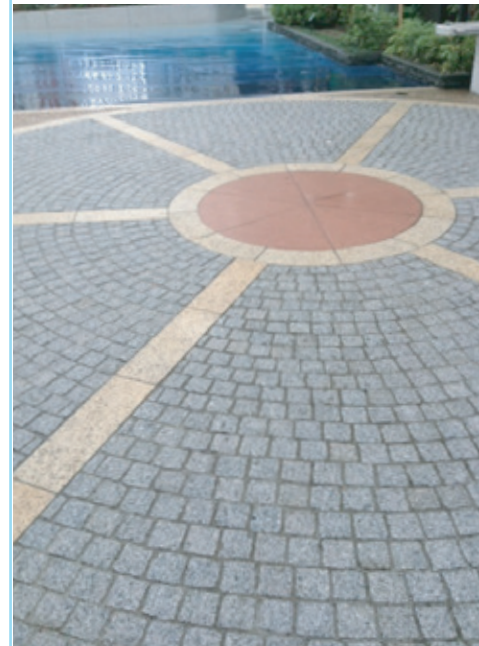

Contact Us

Enterprise 380 – Phu Tai Joint Stock Company

Section 5, Tran Quang Diêu Ward, Quy Nhon City,
Binh Dinh Province, Viet Nam

Tel: +84.256.3741699

Fax: +84.256.3841301

Email: sales@phutai380.com